

Audio Only Source to HDMI Bridge




HDMI
HIGH-DEFINITION MULTIMEDIA INTERFACE

The AU-11HB Audio Source to HDMI Bridge is designed to accept digital (optical) or analogue (L/R Stereo) audio signals and output via HDMI. The device adds a 'blue-screen' video feed into the HDMI signal path so that any HDMI AV receiver or display will accept the audio signal for sound reproduction. It allows audio signals from any source to be easily integrated into a HDMI system which is particularly useful when distributing both audio and video sources via a HDMI matrix, thus extending the capabilities of any multi-room AV system.

FEATURES

- Supports Analogue to Digital Conversion (ADC)
- Supports Optical audio sampling rate 32kHz to 192kHz and LPCM 2-Channel
- Supports L/R audio sampling rate at 48kHz
- Plug and Play with no software required

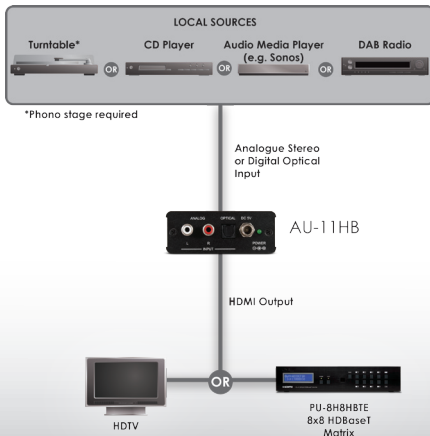

SPECIFICATIONS

Input:	2x RCA (1x Analogue Stereo (L/R)) 1x Toslink (1x Optical 2 Channel LPCM / DTS / Dolby Digital)
Output:	1x HDMI (1x HDMI Uncompressed AV and Data)
Power:	5V/2.6A DC (US/EU standards, CE/FCC/UL certified)
Dimensions:	75mm (W) x 100mm (D) x 30mm (H)
Gross Weight:	160g
Net. Weight:	440g
Packaging:	Retail Packaged

