

WPmVOL-IR

1. Visual indication:



- Lights up in green when infrared signals are received
- Lights up in orange when you try to increase or decrease the volume beyond its maximum/minimum limits
- Lights up in red when the unit is muted

2. Remote control detector

3. Mute key

4. Volume up key

5. Volume down key

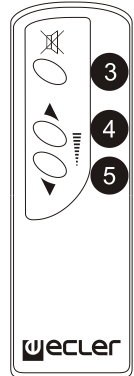


RJ-45 DIAGRAM

Pin 1	White Orange	GND	
Pin 2	Orange	REMOTE VOL (10V+0V → MIN→MAX)	
Pin 3	White Green	GND	
Pin 4	Blue	N.C.	
Pin 5	White Blue	N.C.	
Pin 6	Green	VCC (+12V / +10V)	
Pin 7	White Brown	GND	
Pin 8	Brown	N.C.	

TERMINAL BLOCK DIAGRAM

Pin 1	GND	
Pin 2	REMOTE VOL (10V+0V → MIN→MAX)	
Pin 3	VCC (+10V)	



FACTORY DEFAULT: ALOG
+ 10V

ALOG for analog devices / LIN for digital devices
+ 12V for MIMO88 GPI's / + 10V for other REMOTE ports



50.0236.01.00

ECLER Laboratorio de electro-acústica S.A.
Motors 166-168, 08038 Barcelona, Spain
INTERNET <http://www.ecler.com> e-mail: info@ecler.es

