

PU-1109RX

5-Play HDBaseT™ Receiver (inc. PoE & 3x LAN, up to 100m)




5Play™ **HDBT**™ **HDMI**™
HIGH-DEFINITION MULTIMEDIA INTERFACE

The PU-1109RX Receiver features 5-Play™ HDBaseT™ technology. This will allow the user to distribute uncompressed HDMI, 2-Way IR, 2-Way RS-232, PoE and 3 individual LAN connections over a Single CAT5e/6/7 cable, to lengths of up to 100m.

FEATURES

- Supports all v1.4 HDMI resolutions plus 4k.
- Supports uncompressed video/audio up to 10.2Gbps
- Common supported resolutions: HDTV: 480p, 576p, 720p, 1080i, 1080p, 1080p24; PC: VGA, SVGA, XGA, WXGA, SXGA, UXGA, WUXGA.
- HDMI, HDCP & DVI compliant
- Supports HDCP repeater and CEC functions
- Simultaneously sends uncompressed HD Audio and Video signals, plus IP network data over a single 100m CAT6/7 or 80m CAT5e cable
- HD audio supported: 7.1CH, Dolby TrueHD, DTS-HD
- Ethernet speed up to 100Mbps
- RS-232, IR, and HDMI CEC control pass through
- Supports 3D signals

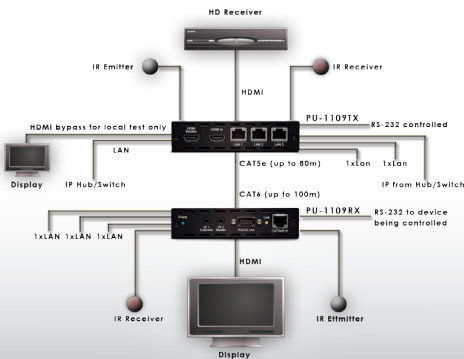

SPECIFICATIONS

Inputs	1x 3.5mm Stereo mini-jack (1x Infra Red Receiver), 1x RJ45 (1x HDMI & Proprietary Data)
Outputs	1x HDMI (1x HDMI Uncompressed AV and Data), 1x 3.5mm Stereo mini-jack (1x Infra Red Emitter), 1x 9pin Dsub (1x RS-232 Data), 3x RJ45 (3x Ethernet I/O) IP
Power:	Self-powering RX via PoE
Dimensions:	125mm (W) x 127mm (D) x 30mm (H)
Net Weight:	1060g
Gross Weight:	1280g
Packaging:	Boxed

