


Digital Audio over CAT6 Extender Set



The PU-304-KIT is designed to send digital audio signals over 150m over CAT5e/6 cable infrastructure. This device supports both Coaxial and Optical signals and can transmit these signals up to 150m. The PU-304-KIT can be powered using a USB cable or the supplied PSU adaptor for added flexibility in a compact design. Digital SPDIF signals are supported up to a sample rate of 96khz, and support for Stereo and Multichannel digital audio (LPCM, DTS, Dolby Digital, Dolby Digital Plus), is also provided.

FEATURES

- Supports Coaxial or Optical digital audio SPDIF signals.
- Supports Stereo and Multichannel digital audio (LPCM, DTS, Dolby Digital, Dolby Digital Plus).
- Supports sample rate up to 96kHz.
- Dual transmission 1 x Coaxial and 1 x Optical
- Signals can be extended over single CAT5e/CAT6 up to 150m

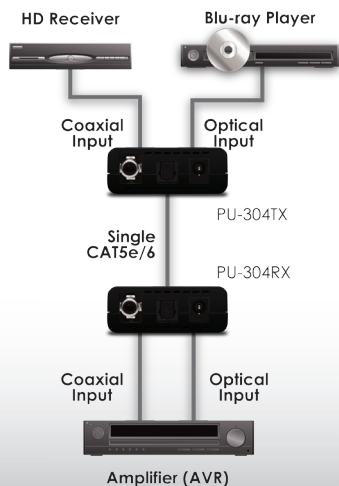

SPECIFICATIONS

PU-304TX

Inputs	1x RCA (1x Coaxial 2 Channel LPCM / DTS / Dolby Digital / Dolby Digital Plus) 1x Toslink (1x Optical 2 Channel LPCM / DTS / Dolby Digital / Dolby Digital Plus)
Outputs	1x RJ45 (1x Digital Audio Propriety Data)
Power:	5V/1A DC (US/EU standards, CE/FCC/UL certified) or USB
Dimensions:	55mm (W) x 85mm (D) x 22mm (H)
Net Weight:	60g

PU-304RX

Inputs	1x RJ45 (1x Digital Audio Propriety Data)
Outputs	1x RCA (1x Coaxial 2 Channel LPCM / DTS / Dolby Digital / Dolby Digital Plus) 1x Toslink (1x Optical 2 Channel LPCM / DTS / Dolby Digital / Dolby Digital Plus)
Power:	5V/1A DC (US/EU standards, CE/FCC/UL certified) or USB
Dimensions:	55mm (W) x 85mm (D) x 22mm (H)
Net Weight:	1060g
Gross Weight:	380g
Packaging:	Boxed

