

New Product PU-515PLRX-2HCD


HDBaseT™ LITE Receiver with dual HDMI output, Audio De-embedding, PoC, RS-232 & 2-way IR (up to 60m)



The PU-515PLRX-2HCD Receiver allows uncompressed HDMI signals to be transmitted over a Single CAT5e/6/7 cable. This device allows the distribution of Video, Audio, Power over Cable (PoC), RS-232 and 2-way IR control functionality over the same CAT5e/6/7 cable. These combined HDMI and control signals can be transmitted up to lengths of 60 metres. This variant of the PU-515-RX Receiver provides dual HDMI outputs for added flexibility enabling distribution to 2 displays within a zone and also provides both digital and analogue audio outputs for local amplification.

FEATURES

- HDMI, HDCP, & DVI compliant
- Supports uncompressed video/audio up to 10.2Gbps
- Supports full range HDTV and PC output resolutions up to 4K2K and WUXGA (RB)
- Receive uncompressed data over a single 60 m/328 ft CAT5e/6/7 cable
- Convergence: Video, Audio, PoC & Control (bi-directional IR & RS-232 bypass)
- Provided with 24V DC power or powered from compatible PoC Transmitter through CAT5e/6/7
- Supports Balanced analog audio output (R/L)
- Support coaxial digital audio up to 192kHz

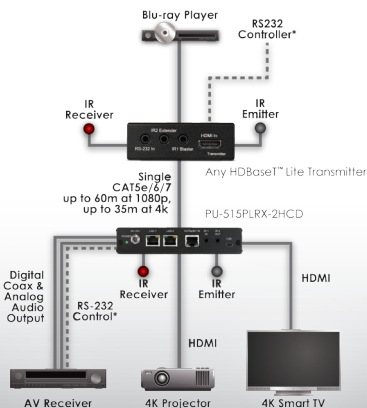

*If supported by transmitter

SPECIFICATIONS

- Input:**
- 1x RJ45 (1x HDBaseT Lite HDMI & Propriety Data)
 - 1x 3.5mm Stereo mini-jack (1x Infra Red Receiver)
 - 1x USB Mini B (1x Service Port Propriety Data)
- Output:**
- 2x HDMI (2x HDMI Uncompressed AV and Data)
 - 1x RCA (1x Coaxial Dolby Digital/DTS/2 Channel LPCM)
 - 1x Phoenix (5 pin) (1x Analogue Stereo (Balanced or Unbalanced)), 1x 9pin Dsub (1x RS-232 Data)
 - 1x 3.5mm Stereo mini-jack (1x Infra Red Emitter)
- Power:** 24V/1.25A (EU/US standards, CE/FCC/UL certified)
- Dimensions:** 105mm (W) x 110mm (D) x 26mm (H)
- Gross Weight:** 400g
- Net. Weight:** 260g
- Packaging:** Boxed

