

# PU-O4H4C


## 4 x 4 HDMI Matrix with built-in HDMI over CAT5e/6 outputs



The PU-O4H4C HDMI matrix has 4 HDMI input and 4 CAT5e/6 transmitter outputs up to 40m. Each of the four HDMI sources can be directed to any one of the four CAT outputs, so each display can show the same or a different source. This unit requires pairing with CYP PU-1106RX receivers to convert each of the outputs back to HDMI for connection to the display. The PU-O products within the PUMA range combine HDMI over CAT5e/6 (PUMA) & HDMI Matrix switcher (ORBIT) to provide versatility to HDMI installations.

### FEATURES

- v1.3 HDMI, HDCP 1.1, DVI 1.0 compliant
- 4 x 4 HDMI Matrix with built-in HDMI over CAT5e/6 outputs
- Resolutions supported: PC - VGA to UXGA ; HDTV - 480i to 1080p + 1080p24fps
- High Definition audio supported: Dolby TrueHD, Dolby Digital Plus, DTS-HD Master Audio + LPCM
- The HDMI input is compensated, clock / phase adjusted, and jitter eliminated so the output is a brand new standard HDMI signal
- RS-232 and IR remote control, plus IR extender
- Supports Deep Colour (10/12 bit)
- Selectable EDID settings - TV (downstream) and STD (fixed)
- LED indicators
- Supports xvYCC
- Supports 3D signals

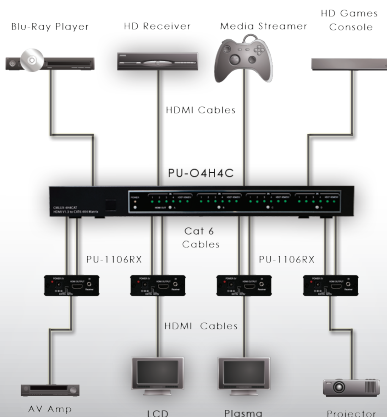

### SPECIFICATIONS

Input:	4x HDMI (4x HDMI Uncompressed AV and Data), 1x 9pin Dsub (1x RS-232 Data), 1x Stereo mini-jack (1x Infrared Receiver)
Output:	5x Stereo mini-jack (5x Infrared Emitter), 8x RJ45 (4x HDMI & Propriety Data)
Power:	5V/6A DC (US/EU standards, CE/FCC/UL certified)
Dimensions:	438mm (W) x 175mm (D) x 44mm (H)
Gross Weight:	3440g
Net. Weight:	3080g
Packaging:	Boxed

