

# QU-12S-4K


## 1 to 2 HDMI Distribution Amplifier with 4K resolution support



The QU-12S-4K Distribution Amplifier (splitter) accepts one HDMI input and splits this signal to two identical outputs. This device is v1.4 HDMI compliant and supports 3D Video signals, 'Deep Colour', and 4K resolutions, together with High Definition Audio. Each buffered output can run 1080p/8-bit up to 20 metres and can also be cascaded up to 3 layers.

### FEATURES

- v1.4 HDMI, HDCP 1.4 and DVI 1.0 compliant
- HDMI 1 to 2 Splitter
- Supports resolutions VGA~WUXGA, 480i~1080p, 4K UHD@24/25/30Hz (RGB 4:4:4 & YUV 4:2:2), 4K UHD@ 60Hz (YUV 4:2:0), 4K/2K@24/25/30Hz (RGB 4:4:4 & YUV 4:2:2) and 4K/2K@ 60Hz (YUV 4:2:0) dependent upon the output display's EDID settings
- High Definition Audio supported: Dolby TrueHD, Dolby Digital Plus and DTS-HD Master Audio plus LPCM
- Auto signal amplification & equalisation improves signal transmission distances
- Supports CEC bypass
- Supports Deep Colour (10 & 12 bit)
- Power LED indicator
- Supports xvYCC
- Supports 3D signals

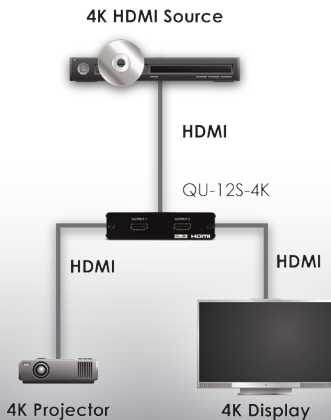

### SPECIFICATIONS

Input:	1x HDMI (1x HDMI Uncompressed AV and Data), 1x USB Mini B (1x Service Only Propriety Data)
Output:	2x HDMI (2x HDMI Uncompressed AV and Data)
Power:	5V/2.6A DC (US/EU standards, CE/FCC/UL certified)
Dimensions:	105mm (W) x 140mm (D) x 25mm (H)
Gross Weight:	740g
Net. Weight:	400g
Packaging:	Boxed

