


# ◆ System Configuration



# GONSIN<sup>®</sup>

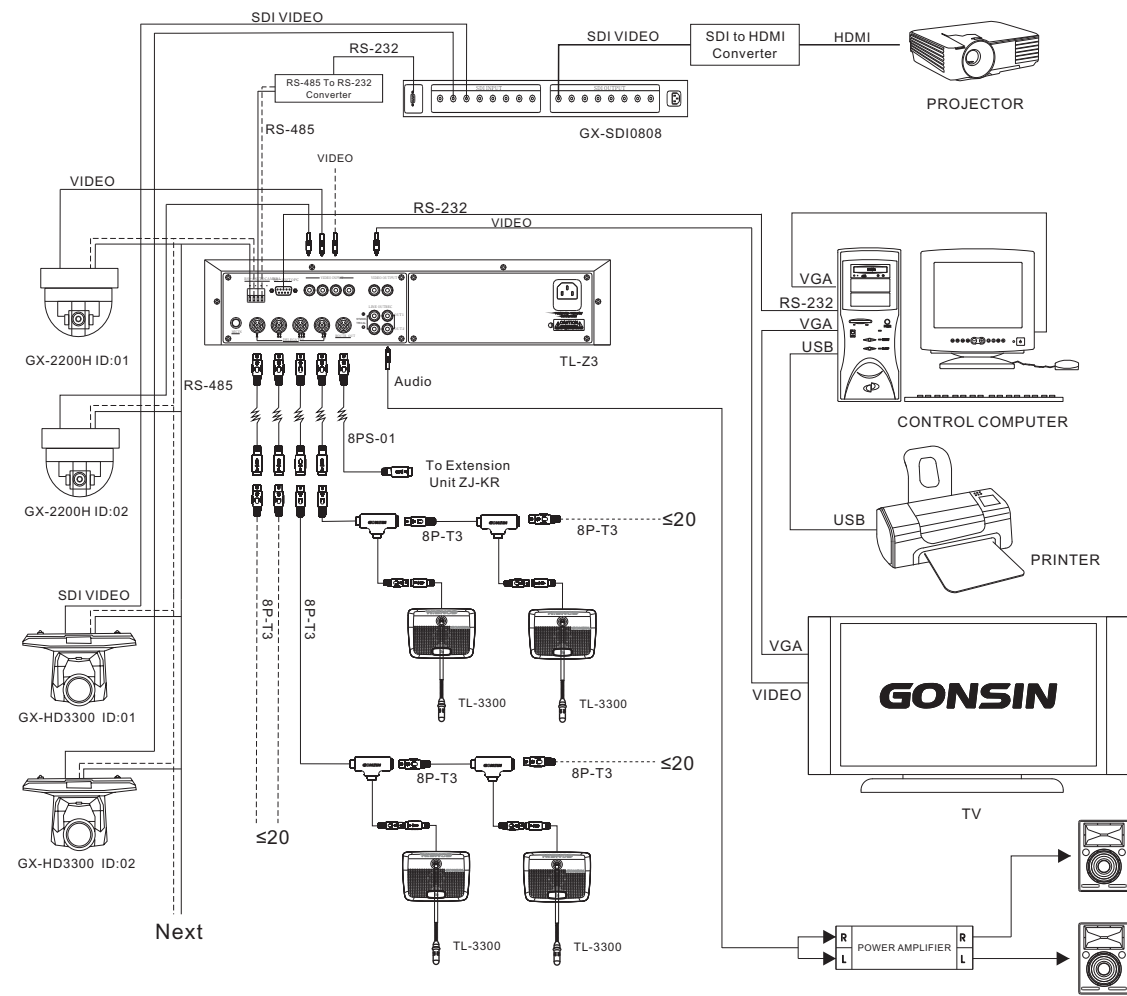

## TL-3300 Digital Conference System



All rights reserved. The information and specifications included are subject to change without prior notice.

GONSIN CONFERENCE EQUIPMENT CO.,LTD.  
www.gonsin.com



**GONSIN<sup>®</sup>**  
Delivering Trust & Value

## ◆ General Description

TL-3300 digital conference system allows the delegate to speak, request to speak and listen to the speech. Each discussion unit comes with headphone jack and volume control for the delegate to listen to the floor audio, and adjust volume level for comfortable listening. 1 to 4 delegate microphones can be active at the same time.

## ◆ Main Features

- ◆ Highly resistant to mobile phone interference
- ◆ Supports HD video camera tracking
- ◆ Multiple chairman /vice-chairman units are allowed
- ◆ Pluggable gooseneck microphone
- ◆ Easily hidden unit connecting cables



## ◆ Basic Functions

- ◆ Selectable microphone modes: AUTO / FIFO / OPERATOR
- ◆ Floor audio listening via headphone or built-in loudspeaker
- ◆ Attendance: key press and supplementary registration
- ◆ Up to 20 chairman and vice-chairman units for one system
- ◆ Chairman units can be activated at any time
- ◆ Chairman unit can override/mute all the active delegate units
- ◆ Supports automatic video camera tracking with preset panoramic position

Compact structure design, easily hidden unit connecting cables, more beautiful appearance.



## ◆ Technical Specifications

|                       |                                     |
|-----------------------|-------------------------------------|
| Mounting type         | Tabletop                            |
| Frequency response    | 50Hz-18kHz                          |
| Sensitivity           | -46dB±4dB                           |
| THD                   | <0.3%                               |
| Power input           | 24V DC                              |
| Microphone length     | Standard 410 mm, Optional 310/510mm |
| Headphone jack        | Mono 3.5mm                          |
| Internal loudspeaker  | 4Ω/3W                               |
| Weight                | 0.75 kg                             |
| Dimensions            | 190×162×60 mm (W*D*H)               |
| Operating temperature | 0~45°C                              |
| Storage temperature   | -20~50°C                            |