

ARQIS110

CABINET LOUDSPEAKERS

Architectural Loudspeaker Cabinet



PRODUCT OVERVIEW

ECLER ARQIS 110 is a wooden loudspeaker cabinet with a compact format, stylish aesthetics, excellent sound quality and long term reliability, featuring 220 WRMS @ 8 ohm, 10" woofer and 1" HF Compression Driver. 35 mm mount socket and 8 x M8 rigging points, allowing for horizontal or vertical mounting options $(90^{\circ}x50^{\circ}$ dispersion pattern). It has been specifically designed to fulfil permanent installation requirements where a perfect balance between sound performance and architectural/interior's design matching is a must.

KEY FEATURES

- Full range, 2-way architectural loudspeaker
- 220 WRMS @ 8 ohm
- 1 x 10" low frequency woofer
- 1" high frequency compression driver (rotable)
- Double INPUT/STACK connector, Euroblock + Speakon© type, with security attachment screws to avoid accidental disconnection
- 35 mm mount socket, compatible with SR12 wall bracket (not included) & TRIPO1 floor stand (not included)
- U-bracket wall-mount accessory compatible (not included)
- 8 x M8 cabinet flying points.
- Metal safety sling included, to avoid drops in case of accidental detachment from the wall surface
- Available in black or white finish

APPLICATIONS

- Shopping malls
- Sports centres
- Theatres / auditoriums
- Conference rooms
- A/V presentations
- Corporate rooms
- Perimeter reinforcement in clubs
- Cafés
- Restaurants
- Theme parks

ACCESSORIES AND COMPATIBLE PRODUCTS

- ARQ110UB (U-bracket wall-mount)
- SR12 (Wall-mount bracket)
- TRIPO1 (Loudspeaker floor stand)



TRIPO1




ARQ110UB




POLAR DIAGRAMS

HORIZONTAL

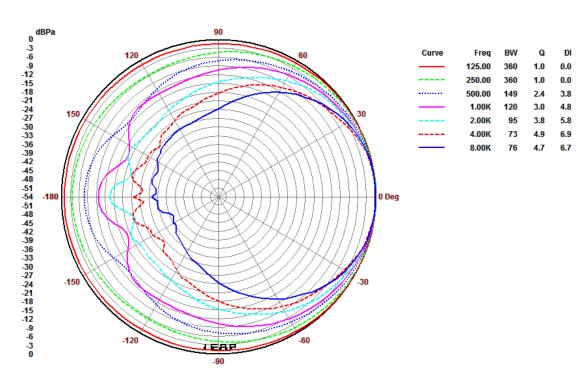


VERTICAL

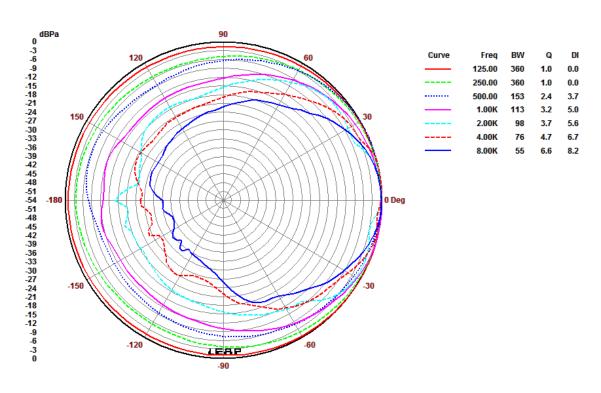



FREQUENCY RESPONSE

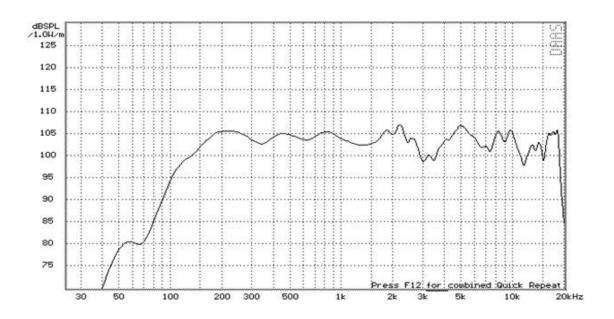

TECHNICAL DATA

| Ways | 2 |
|---------------------------|-------------------------------------|
| Impedance | 8Ω |
| RMS power | 220 WRMS |
| Program power | 440 WRMS |
| Sensitivity | 95dB |
| Sound pressure | 118dB |
| Frequency response (±3dB) | 60Hz÷18kHz |
| Cross-over frequency | 3.5kHz |
| Dispersion (HxV) | 90°x50° |
| Driver LF/MF | 10" |
| Driver HF | Compression driver 1" |
| Connection | Euroblock 2 ways + Speakon© 4 ways |
| Dimensions (WxHxD) | 359x495x310mm |
| Weight | 14.8kg |
| Color | Black (RAL 9005) / White (RAL 9016) |